

LED BATTEN LIGHT

Developed for use in areas commonly fitted with fluorescent batten. Widely used for ambient lighting applications.



FEATURES

- Excellent light spread
- No glare or strobe effect
- Flexible mounting options available

TECHNICAL SPECIFICATIONS

LED Sources	45W, 70W
Input Voltage	AC (100-240V)
Power Factor	>0.9
Colour Rendering Index	WW: >80
Current	0.20A*
Colour Temperature	CW: 6000K
Working Temperature	-20°C to 45°C
IP Rating	IP65
Life Span	>30,000hrs
Materials	6063 Aluminium
Weight	5kg
Luminous Flux	4600lm
Dimensions	1180x145x65mm

*AC Current rating at 230V AC

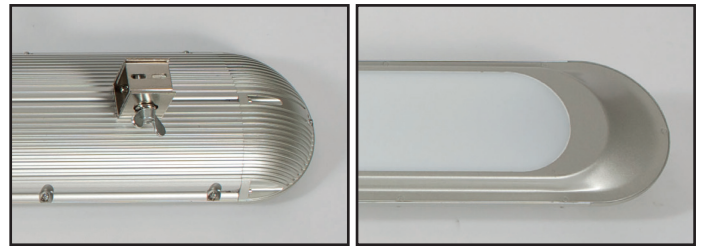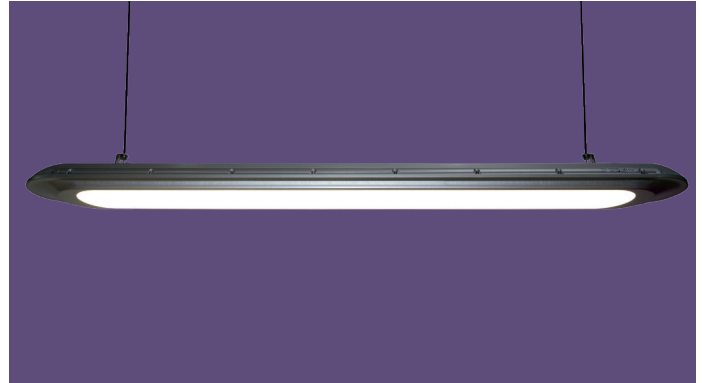


IDEAL FOR:



- Parking Buildings
- Fuel Stations
- Warehousing
- Office Buildings
- Schools
- Retail

SDOC is available on our website

DIMENSIONS

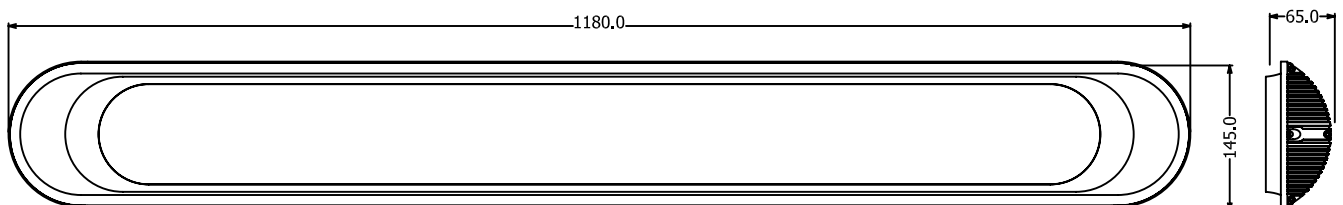

PHOTOMETRICS

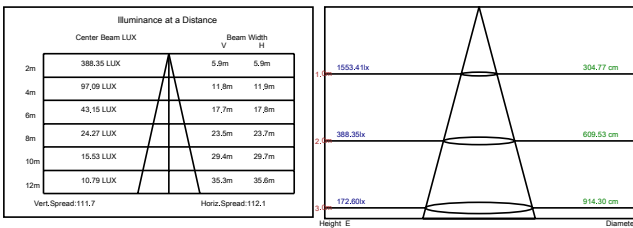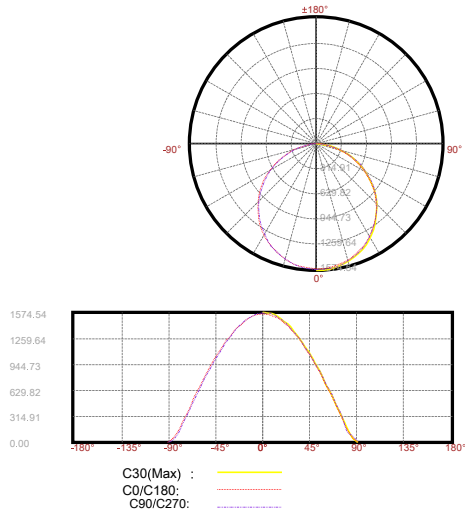

78 Cryers Road
 East Tamaki
 Auckland.
 NEW ZEALAND
phone: 64 9 272 5619