

TNL0729-60 • TNL0729-80

LED STREET LIGHT – 60W & 80W

TNL0729 range is our latest low maintenance LED street light for residential areas, branch roads and carparks. It comes with excellent optical design and light distribution.

A photocell/daylight sensor is available on some models if this is desired.

This unit boasts a broad light distribution due to the dual LED chips angled optimally to get the most light spread from this unit.

APPLICATIONS

City streets, pavements, squares, schools, parks, yards, residential areas, factories, carparks and any other places where lighting is needed.



TECHNICAL SPECIFICATIONS



Fixture/Part No.	TNL0729-60	TNL0729-80
Input Voltage (V)	100-240V AC	
Power (W)	65	80
Power Factor	≥0.95	
Colour Temperature (K)	4000K 5700K	
Luminous Flux (lm)	5200	6400
Colour Rendering Index (Ra)	70	
IP Rating (IP)	IP65	
Working Environment	-30°C TO 45°C	
Weight	6.5kg	
Connector Size	60/50	
Dimensions	655x202x295mm	

CAT NO.	Photocell / Sensor	Supply Voltage	Current
TNL0729-60	YES	100-240V AC	0.26A*
TNL0729-60NS	NO	100-240V AC	0.26A*
TNL0729-80	YES	100-240V AC	0.35*
TNL0729-80NS	NO	100-240V AC	0.35*



⁽¹⁾ Universal mounting adapter 35 - 65mm available: Part #TNLSLPA

* Current Rating at 230V AC


INSTALLATION OPTIONS

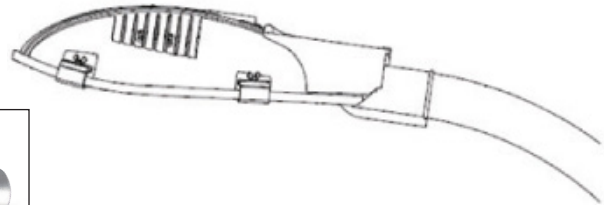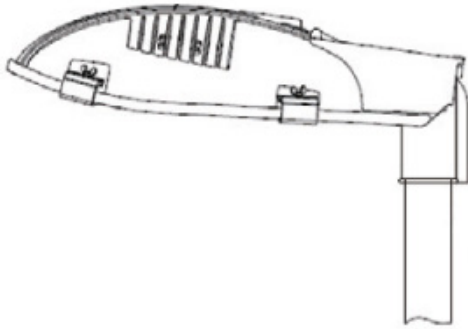

DIMENSIONS

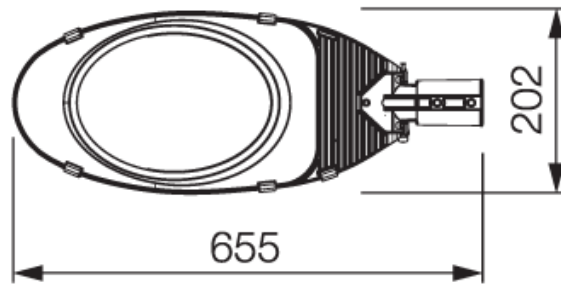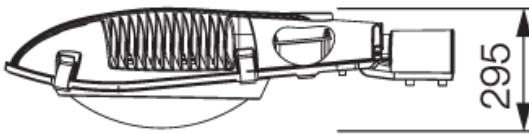

PHOTOMETRICS

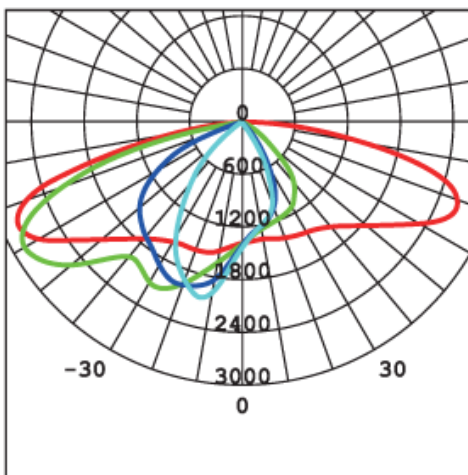

Unit: cd C0/180 C30/210 C60/240 C90/270

Average beam angle (50%): 158.6°

20 Neilpark Drive
East Tamaki
Auckland.
NEW ZEALAND
phone: 64 9 272 5619