

LEDDL175-70AC • LEDDL210-70AC • LEDDL260-38NW-WHITE

LED COMMERCIAL DOWNLIGHTS

The commercial LED downlight range covers most requirements for office, classroom and retail applications. These downlights are extremely robust, reliable and come with a dimmable driver enhancing efficiency. This downlight is an ideal replacement for 150W metal halide downlights in high-mounting ceilings.



FEATURES



- Reduce Energy Costs by up to 50%
- External dimmable driver (1-10V)
- 3 year limited warranty
- Comes with a secondary suspension mounting wire for enhanced safety

TECHNICAL SPECIFICATIONS


Fixture/Part No.	LEDDL175-70AC	LEDDL210-70AC	LEDDL260-38NW-WHITE
Power Consumption	70W	70W	38W
Input Voltage	200-240V AC, 50/60Hz		
Fixture Lumens	5132lm (4000K)	5132lm (4000K)	3228lm (4000K)
Beam Angle	50°	50°	45°
LED Lighting Efficiency	75lm/W		
Colour Temperature	(NW) Natural White 4000K (PW) Pure White 5000K (CW) Cool White 6000K		
Colour Rendering (Ra)	>85		
Power Factor	>.95		
IP Rating	IP20		
Lifespan	35,000 hours		
LED	CITIZEN LM80, L70		
Eco-friendly	ROHS		
Materials	Oxidised Aluminium, Glass		
Driver	Dimmable (1-10V)		
Dimensions	190mm Faceplate, 175mm Cutout	230mm Faceplate, 210mm Cutout	280mm Faceplate, 260mm Cutout

Add suffix: PW = Pure White
 NW = Natural White
 CW = Cool White


LIGHT DISTRIBUTION

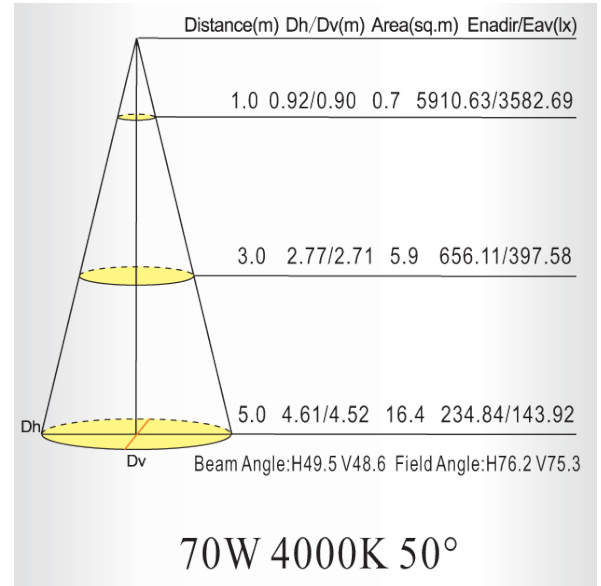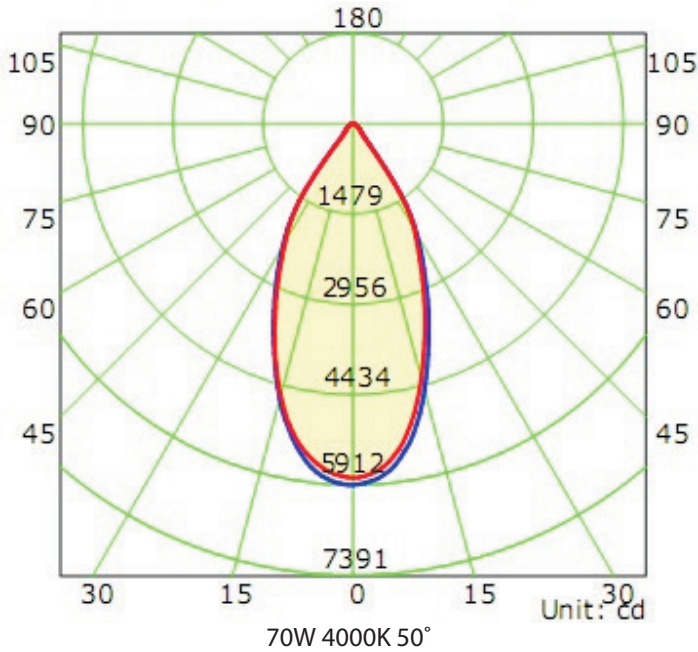

DIMENSIONS

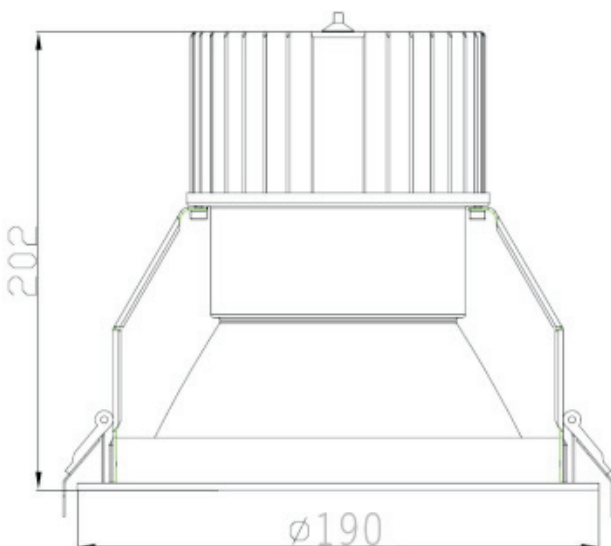

LEDDL175-70AC

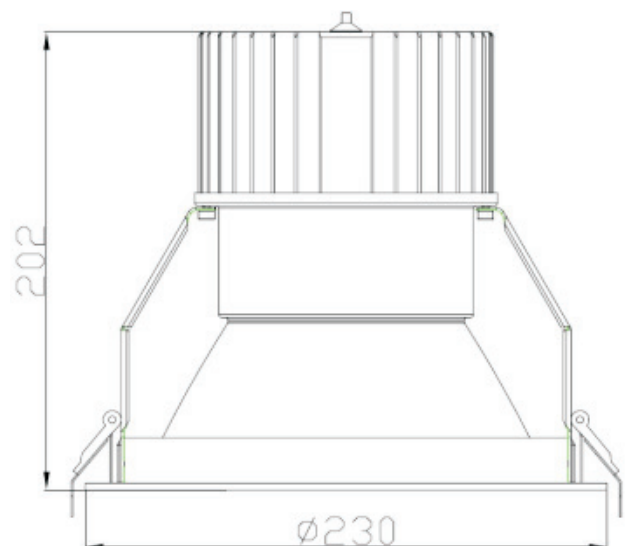

LEDDL210-70AC