

### LED RECESS DOWNLIGHT

The ECOlight LED Recess Downlight is designed for general lighting purposes and is perfect for supplementary lighting for show centres, malls, stores, hospitals and banks.

This downlight provides a high level of light and is very energy efficient. These can be used as a direct replacement for fluorescent troffers in false ceilings or to replace existing traditional downlights.



### TECHNICAL SPECIFICATIONS

LED Source	40W
Power Supply Efficiency	>90%
Power Factor	>0.95
LED Lighting Efficiency	75lm/W
LED Beam Angle	153°
LED Lumens	3,200lm
Dimmable	No
Colour Rendering Index	Ra>75
Colour Temperature	(CW) Cool White 5700K (NW) Natural White 5000K
IP Rating	IP20
Ambient Temperature	-20°C to 40°C
Life Span	>30,000hrs
Eco-friendly	No UV, IR, Lead or Mercury
Materials	Aluminium Alloy heat sink & housing, Frosted glass diffuser
Weight	2.34kg
Dimensions	240mm x 155mm x 208mm
Power Cable	3m with 3 pin plug




CAT NO.	Colour Temperature	Lumens	Power
LEDDL210-40AC	Cool White	3200	40W
LEDDL210-40ACNW	Natural White	3100	40W

SDOC is available on our website

**PRODUCT IMAGE – LENS**



**DIMENSIONS**

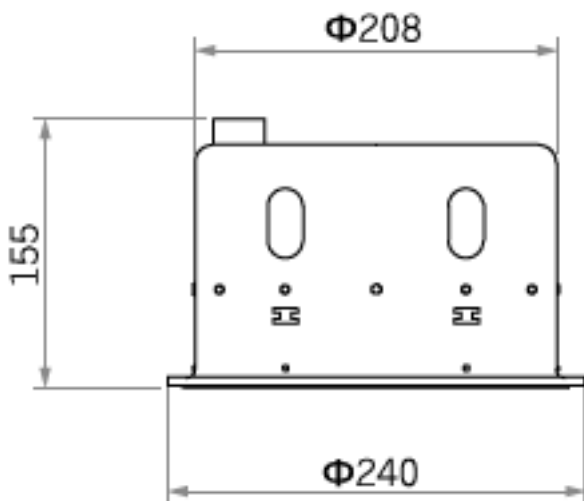

**BEAM ANGLE**

