

## LEDFL11-25 • LEDFL11-40

### 25W & 40W LED INDUSTRIAL FLOOD LIGHTS

The LEDFL11 floodlight range is the light of choice for most general purpose domestic and commercial applications.

Made from a powder coated aluminium housing, with a frosted toughened glass lens and stainless steel fasteners, the LEDFL11 is a robust LED Floodlight made to withstand tough environmental conditions. DC options offer flexibility for different applications. Alternative mounting options such as cable tray make for a fast effective installation.

Available in both 25W and 40W. Note: Red, Blue & Green light output available on special order

Marine Coating & non standard housing colours are also available on special order.

#### FEATURES

LED Sources	25W, 40W
Input Voltage	AC (85~265V, 50-60Hz) DV 12V or DC24V
Power Supply Efficiency	>90%
Power Factor	>0.98
LED Lighting Efficiency	100lm/W
Colour Rendering Index	Ra>80
Colour Temperature	Cool White 5700K Warm White 3000K
Ambient Temperature	-40°C to 55°C
IP Rating	IP65
Life Span	>50,000hrs
Eco-friendly	No UV, IR, Lead or Mercury
Materials	LM06 equivalent Aluminium, high intensity toughened glass
Weight	3.3kg
Dimensions	262x185x163mm



CAT NO.	Lumens	Power	Supply Voltage	Current
LEDFL11-25AC	2250	25W	85 ~ 265V AC	0.12A*
LEDFL11-40AC	3600	40W	85 ~ 265V AC	0.18A*
LEDFL11-40ACBK**	3600	40W	85 ~ 265V AC	0.18A*
LEDFL11-40ACWW	3600	40W	85 ~ 265V AC	0.18A*
LEDFL11-40ACNSC***	3600	40W	85 ~ 265V AC	0.18A*

\* AC Current rating at 230V AC; DC Current at 24V DC

\*\* Black housing


\*\*\* Marine Coating

Note: DC & Polycarbonate options are available on special request



SDOC is available on our website

20 Neilpark Drive  
East Tamaki  
Auckland.  
NEW ZEALAND  
**phone: 64 9 272 5619**

## INSTALLED PRODUCT IMAGES

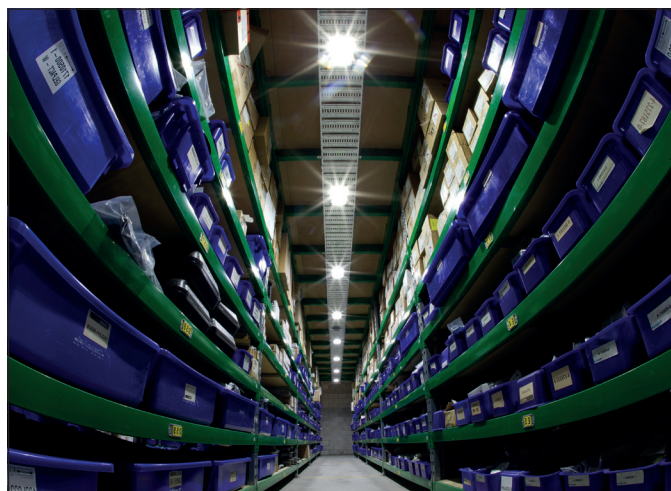

## DIMENSIONS



20 Neilpark Drive  
East Tamaki  
Auckland.  
NEW ZEALAND  
phone: 64 9 272 5619