




**ECO  
LIGHT**  
INDUSTRIAL LED

**LED  
COMMERCIAL  
OFFICE  
LIGHTS**

**LEDOL-50-NW**

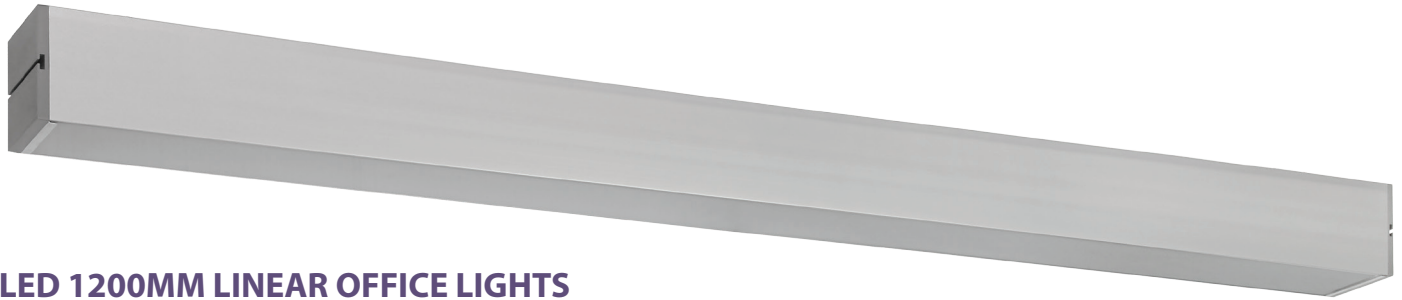

### LED 1200MM LINEAR OFFICE LIGHTS

This attractive 1200mm long LED office linear light has a brushed extruded aluminum housing with opaque acrylic lens. This fitting is designed for either suspended or flush mounting to ceilings. The Osram driver is inbuilt with internal Wago quick disconnecter.

#### TECHNICAL SPECIFICATIONS


Fixture/Part No.	LEDOL-50-NW
Power Consumption	50W
Fixture Lumens	3200lm
Colour Temperature	4000K (NW)
Colour Rendering (Ra)	>80
IP Rating	IP20
LED	EPISTAR 5730
Driver	Osram
Input Power	220-240V/50Hz
Power Factor	0.9
Dimmable	No
Ambient Temperature	-10°C to 45°C
Material	Brushed Aluminium, High Quality PMMA
Dimensions	1174x67x75mm
Cable	1m grey 3core cable terminated with NZ 3 pin plug



#### IDEAL FOR:


- Retail
- Offices
- Schools
- Hotels
- Foyers
- Hospitals
- Receptions

#### INSTALLATION

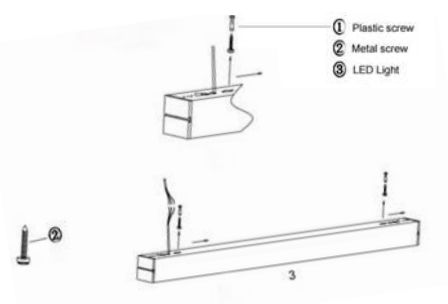

**ECO  
LIGHT**  
[www.ecolight.co.nz](http://www.ecolight.co.nz)

**DIMENSIONS**

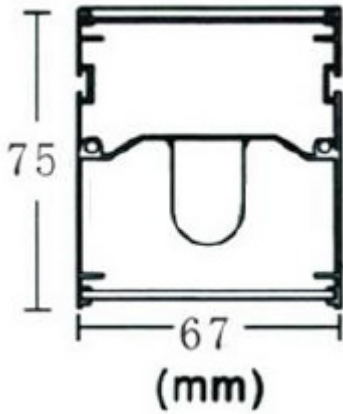

**PHOTOMETRICS**

