



**ECO  
LIGHT**  
INDUSTRIAL LED

**LED**  
OFFICE/SCHOOL  
**LINEAR**  
**LIGHT**

**LEDOLXX00-XX-NW**



## LED LINEAR OFFICE/SCHOOL LIGHTS


This attractive LED school and office light comes with powder-coated white aluminium body and opaque acrylic lens. Options are available in different lumen outputs and lengths depending on project requirement. This fitting is designed for flush mounting to ceilings and walls or can be suspended. The Osram driver is inbuilt with internal Wago quick disconnecter.

- APPLICATIONS:**
- Foyers
  - Offices
  - Schools
  - Hospitals
  - Public buildings


### TECHNICAL SPECIFICATIONS

Power Consumption	50W, 70W
Fixture Lumens	4250lm (50W), 5950lm (70W)
Colour Temperature	NW: 4000K
Luminous Efficacy	85lm/W
Colour Rendering (Ra)	>83
IP Rating	IP20
LED	EPISTAR 2835
Driver	Osram
Input Power	220-240V/50Hz
Power Factor	0.9
Dimmable	No (dimming on special order)
Ambient Temperature	-10°C to 45°C
Material	White powder-coated rolled steel body with high quality opaque PMMA
Dimensions	1200x208x70mm (50W) 1500x208x70mm (50W) 1500x208x70mm (70W)
Cable	1m white 3core cable with NZ 3 pin plug

### DIMENSIONS

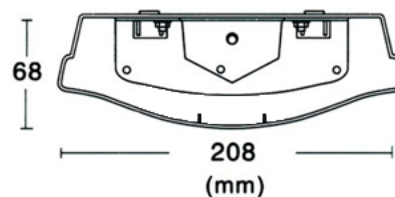

### PHOTOMETRICS

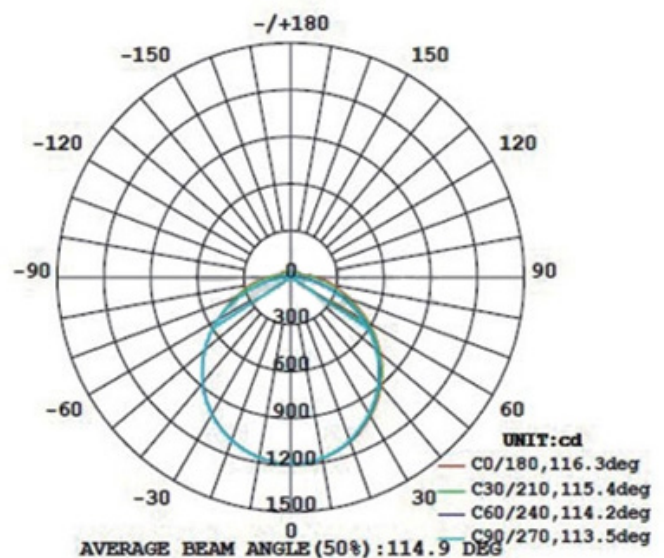

CAT NO.	Product Dimensions	Wattage/ Lumens
LEDOL1200-50-NW	1200x208x70mm (50W)	50W, 4250lm
LEDOL1500-50-NW	1500x208x70mm (50W)	50W, 4250lm
LEDOL1500-70-NW	1500x208x70mm (70W)	70W, 5950lm

**ECO  
LIGHT**  
[www.ecolight.co.nz](http://www.ecolight.co.nz)