

## LED STREET LIGHT – 40W & 60W

TNL0727 is our latest low maintenance LED streetlight for residential areas, branch roads and carparks. With a streamlined appearance and elegant design it will fit in well in new developments as well as established areas.

### FEATURES

- Higher luminous efficiency
- Lower light degradation
- Modularisation
- Die-cast aluminium housing
- PC lens with higher light transmission
- Built in power supply
- IP65 rated

### APPLICATIONS

City streets, pavements, squares, schools, parks, yards, residential areas, factories, carparks and any other places where lighting is needed.

### TECHNICAL SPECIFICATIONS


Fixture/Part No.	TNL0727-40	TNL0727-60
Input Voltage (V)	220-240V AC	
Power (W)	40	60
Lumen Output	4,800lm	≥7200lm
Luminous Efficiency (lm/W)	≥120	
Power Factor	>0.9	
Colour Rendering (Ra)	≥70	
Colour Temperature	5000-5700K	
IP Rating	IP65	
Lighting Beam Angle	Type II	
Working Temperature	-30°C to 40°C	
Weight	3.3kg	
Mounting Height	4m to 7m	7m to 9m
Photocell lighting control	Available (add suffix: ACNS)	
Dimensions	530mm L x 245mm W x 104mm H	
Spigot Sleeve	Accepts from 35mm up to 60mm	




APPLICATIONS



DIMENSIONS

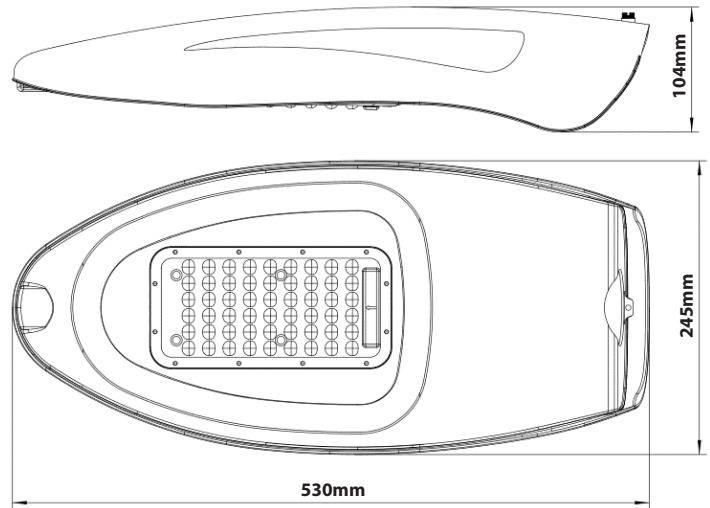

PHOTOMETRICS

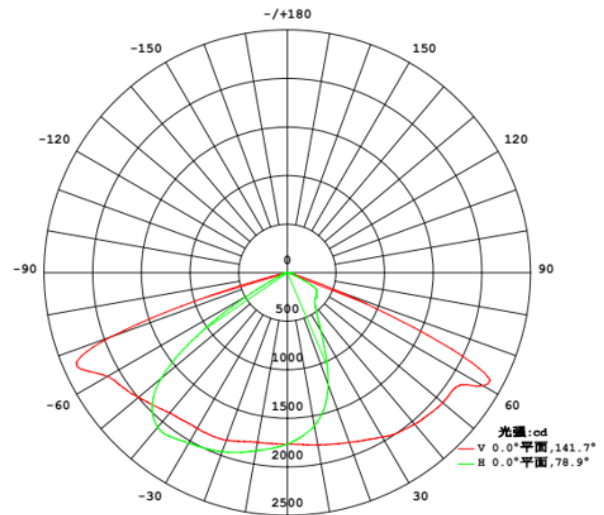

78 Cryers Road  
 East Tamaki  
 Auckland.  
 NEW ZEALAND  
 phone: 64 9 272 5619