

CLARA 720

DIMENSIONS

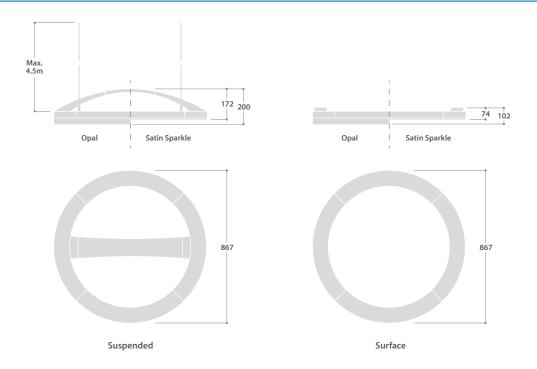


PHOTOMETRIC GUIDE




SUSPENDED -SATIN SPARKLE

DOWN 70% / UP 30% Luminaire Lumen Output 59W = 8235lm 100W = 14395lm




SURFACE -SATIN SPARKLE

DOWN 83% / UP 17% Luminaire Lumen Output 52W = 7290lm 80W = 11695lm



SUSPENDED -OPAL

DOWN 60% / UP 40% Luminaire Lumen Output 59W = 7790lm 100W = 13080lm



SURFACE -OPAL

DOWN 73% / UP 27% Luminaire Lumen Output 52W = 6705lm 80W = 10380lm

WIRING TIDY



Suitable for use with suspended versions the Wiring Tidy is a surface mounted, easy connect, wiring box for use on solid ceilings.

	34	
83		155

ACCESSORY

DESCRIPTION	CAT. No.	APPROX. kg
Wiring tidy (For use on suspended versions only)	LL 13361W9	0.4

Feb. 21 **Lighting**





HIGH EFFICIENCY LED PENDANT LUMINAIRES









SPECIFICATION

- Die-cast aluminium body finished full polyester white (RAL9016)
- High efficiency satin sparkle or opal polycarbonate diffuser
- Direct/indirect illumination
- · Uplight white as standard with red, green or blue options
- Supplied fully assembled
- Surface option for direct mounting
- Suspended version supplied with easily adjustable wire suspensions and pre-wired clear supply cable (maximum suspension distance - 4.5m)
- Smart versions with intelligent lighting control for use up to 8 metres mounting height
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80	
COLOUR TEMPERATURE	4000K	
RATED LIFE (HOURS)	100K - L70/B10	
PROTECTION	LUX GUARD	
DRIVER EFFICIENCY	>85%	
REPLACEABLE	YES	
POWER FACTOR	>0.95	
LL/CW	127.1	

For LED characteristics explanation see www.thorlux.com.au/led-characteristics

SUSPENDED RANGE

	LED	SATIN SPARKLE	OPAL	APPROX. kg	CIRCUIT
SMART	59W	CA 17283	CA 17390	10.5	D/SS
	100W	CA 17284	CA 17391	10.5	D/SS
STANDARD	59W	CA 17285	CA 17392	10.4	L/A
	100W	CA 17286	CA 17393	10.4	L/A

SURFACE MOUNTED RANGE

	LED	SATIN SPARKLE	OPAL	APPROX. kg	CIRCUIT
SMART	52W	CA 17287	CA 17394	7.9	D/SS
	80W	CA 17288	CA 17395	7.9	D/SS
STANDARD	52W	CA 17289	CA 17396	7.8	L/A
	80W	CA 17290	CA 17397	7.8	L/A

CIRCUIT TYPE - suffix catalogue number with: SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming / A - dimming (DALI) e.g. CA 17283SS etc.

COLOURED UPLIGHT - suffix catalogue number with: **R - Red** / **G - Green** / **B - Blue** e.g. **CA 17283DR** etc. Uplight is supplied white as standard.

