



**ECO
LIGHT**
INDUSTRIAL LED

LED
INDUSTRIAL
& COMMERCIAL
FLOODLIGHT

LEDIFL04-45AC

COMMERCIAL & INDUSTRIAL LED FLOODLIGHT 45W

The LEDIFL04-45AC is a robust and compact 45W floodlight delivering 5,400lm.


Perfect for installing onto facades and eaves to light up pathways and entrances.

TECHNICAL SPECIFICATIONS


Fixture/Part No.	LEDIFL04-45AC
Power	45W
Lumens	5400lm
LED Lighting Efficiency	120lm/W
Colour Temperature	CW: 5700K
Colour Rendering (Ra)	>70
IP Rating	IP66
Calculated L70/B10	>62,000 hours
LED	Luxeon 30/30
Impact Resistance	IK10
Ambient Temperature	-40°C to +50°C
Power Factor	0.98
Body Weight	2.7kg
Dimensions (mm)	296 L x 151 W x 105 H
Input Voltage	90-305V AC
Material	Magnesium alloy housing, PMMA lens
Coating	Anti-corrosion powder-coat
Cables	White 3 core flex, 2m length terminated with NZ plug for easy plug & play



DIMENSIONS

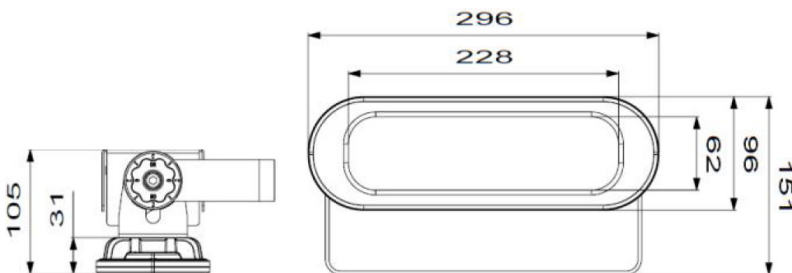

ISOLUX PLOT

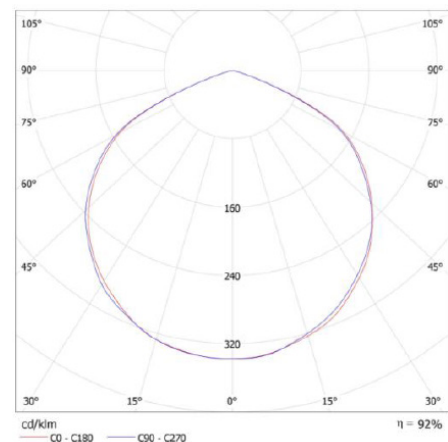

**ECO
LIGHT**
www.ecolight.co.nz