



VISIO PRO

DIMENSIONS

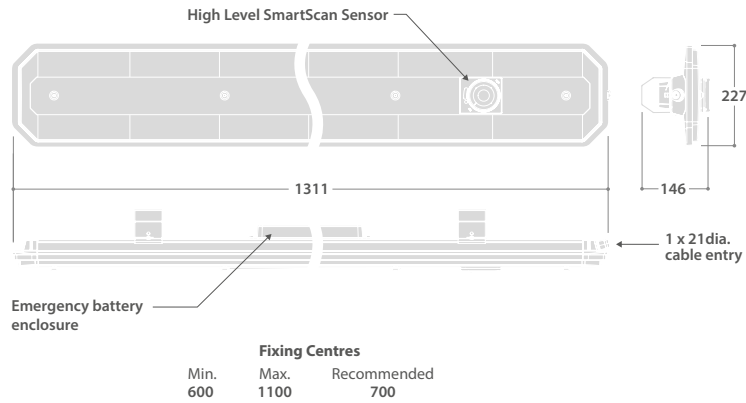

PHOTOMETRIC GUIDE

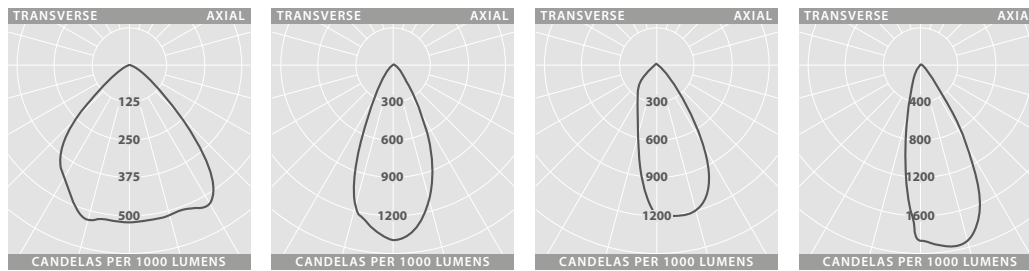

AREA BROAD

Luminaire Lumen Output:
 122W = 19930 lm
 141W = 23065 lm
 228W = 33465 lm

AREA MEDIUM

Luminaire Lumen Output:
 122W = 20425 lm
 141W = 23635 lm
 228W = 34290 lm

RACK MEDIUM

Luminaire Lumen Output:
 122W = 19880 lm
 141W = 23005 lm
 228W = 33375 lm

RACK NARROW

Luminaire Lumen Output:
 122W = 20160 lm
 141W = 23330 lm
 228W = 33850 lm

WEIGHTS

WATTAGE	APPROX. kg
122W	9.2
141W	9.2
228W	9.6

EMERGENCY

Add 0.3kg to weight listed.

SMARTSCAN

Add 0.3kg to weight listed.

AMBIENT OPERATING TEMPERATURES

LED	STANDARD/SMARTSCAN 100,000 HOUR LIFE EXPECTANCY		STANDARD/SMARTSCAN 70,000 HOUR LIFE EXPECTANCY		EMERGENCY	
	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM
122W	-20°C	50°C	-20°C	55°C	0°C	30°C
141W	-20°C	45°C	-20°C	50°C	0°C	30°C
228W	-20°C	40°C	-20°C	45°C	0°C	30°C



SUPREME PERFORMANCE LED LUMINAIRES FOR ARDUOUS ENVIRONMENTS



SPECIFICATION

- Extruded aluminium body with die-cast ends finished full polyester powder coat silver (RAL9006)
- Long life silicone sponge gasket ensuring IP66 rating
- Four light distribution options
- Up to 34,290 lumen output
- Up to 159.6 luminaire lumens per circuit watt
- Clip-fit stainless steel mounting brackets for fast installation (supplied)
- Smooth wipe clean surfaces, no dust traps
- Complies with food production standards IFS, HACCP and BRC
- SmartScan versions suitable for use up to 18m mounting height
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 2m flying lead
- Fitted with 4000K LEDs



LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L70/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>94%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	159.6

For LED characteristics explanation see www.thorlux.com.au/led-guide

SmartScan Configurations



Find out more at www.thorlux.com.au/smartsan

CONFIGURATOR

EMERGENCY TYPE ♦	PRODUCT CODE	WATTAGE	NOMINAL SIZE	DISTRIBUTION	CONTROL TYPE
W SmartScan*	VP Visio Pro	122 122W	M 1400mm	AB Area Broad	S SmartScan
		141 141W		AM Area Medium	A Dimming (DALI)
		228 228W		RM Rack Medium	
				RN Rack Narrow	

E.g. WVP122MABS

W SmartScan	VP Visio Pro	122 122W	M 1400mm	AB Area Broad	S SmartScan
-------------	--------------	----------	----------	---------------	-------------

♦ Optional, leave blank if emergency is not required

* Only available with S control type