



**ECO
LIGHT**
INDUSTRIAL LED

**LED
STRIP
LIGHTING**

LEDPRO-1000-14-KIT • LEDPRO-2000-28-KIT

LED ALUMINIUM PROFILE 14.4W STRIP

This Kitset comprises of LED strip and brushed aluminum profile with a PMMA diffuser and NZ plug transformer. The LED Strip is 24V DC, 14.4W per lineal metre in both 4000K and 5000K options, complete with double sided tape on the back to very easily mount into the housing. The strip is terminated with a female plug designed for the power supply.

The Aluminium profile housing and corresponding diffuser can come in either 1m or 2m lengths and is complete with small flush mounting kit.

TECHNICAL SPECIFICATIONS

Power Consumption	14.4W per lineal metre
LED Strip Lumens	800lm (1m) 1600lm (2m)
Colour Temperature	4000K (NW) 5000K (PW)
Colour Rendering (Ra)	>85
IP Rating	IP20 (IP55/65 on special order)
LED	SMD 3528
Driver	24V DC AC/DC adaptor with 2 pin NZ plug
Power Factor	0.9
Dimmable	No (Yes with different power supply)
Ambient Temperature	-20°C to 45°C
Material	Brushed Aluminium, high quality PMMA
Housing Dimension	1000/2000 x 19 x 19mm
Cable	1m black 2core cable terminated with NZ 3 pin plug power adaptor
Kit Materials	Aluminium profile, diffuser, endcaps, mounting kit. LED strip with tape on back, terminated with plug. AC/DC power adaptor with matching DC plug and AC NZ 2 pin plug.



APPLICATIONS

- Cove lighting
- Architectural lighting
- Task lighting
- Cabinet lighting
- Retail shelving lighting

AC/DC POWER ADAPTOR



20 Neilpark Drive
East Tamaki
Auckland.
NEW ZEALAND
phone: 64 9 272 5619



www.ecolight.co.nz

ALUMINIUM PROFILE DIMENSIONS




ADDITIONAL KIT OPTIONS (SPECIAL REQUEST*)

Meanwell IP67 1-10V dimmable constant current drivers



Options on LED strip and IP rated protection

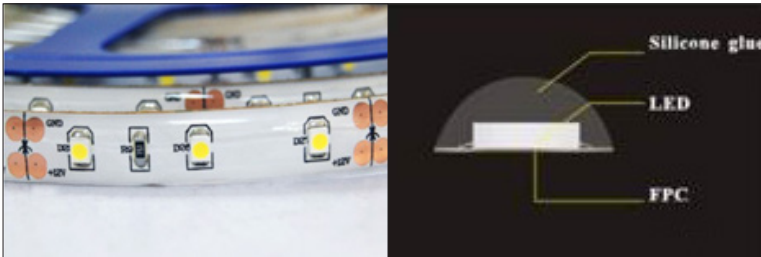

*Please contact one of the ECOlight team for more information for non stock item pricing.
Lead time & minimum quantities will be required.